

BRAID OVER RUBBER

- Maximum operating pressure of 500psi (Sizes up to AN-12), and 350psi above AN-12
- Temperature range -40°C to 150°C
- Recommended for use with fuels*, oils, synthetic lubricants, air and coolant
- *Fuels include E85 and methanol
- Not to be used inside a Fuel Tank, or with Brake Fluids



100 Series

- Stainless steel braid
- Raw stainless finish



120 Series

- Nylon braid
- Matt black finish



140 Series

- Stainless steel braid
- Shiny black finish


BRAID OVER PTFE

- Maximum operating pressure of 1200psi (AN-12)
- Temperature range -70°C to 250°C
- The best Hose to use for Fuels, due to no permeation of fuel smell
- Suitable for use with oils, synthetic lubricants, air, coolant, brake fluid, power steering, automatic transmission, vacuum and nitrous
- 200 Series Hose can be used intank



200 Series

- Stainless steel braid
- Raw stainless finish

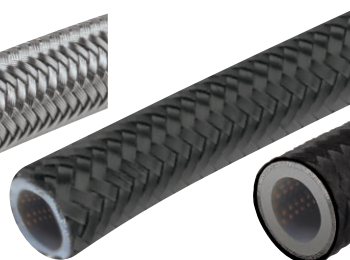

230 Series

- Stainless steel braid
- Shiny black finish



240 Series

- Nylon braid
- Matt black finish

RUBBER

- Maximum operating pressure of 250psi
- Temperature range -40°C to 100°C
- Well priced AN Hose solution suitable for use with fuels*, oils, coolant, water and air
- Not suitable for vacuum, brake fluid, power steering or automatic transmission lines



400 Series

- Push lock
- Not suitable for intank use

CLEAR PVC REINFORCED




700 Series

- Breather Hose
- For low pressure applications
- Temperature range 5°C to 70°C
- Can be used with water

HARDLINE

- Suitable for use with all Automotive Fluids and Lubricants

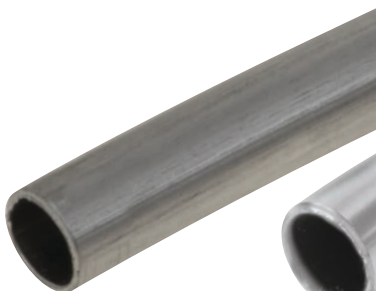

300 Series

- Steel / stainless steel



600 Series

- Raw aluminium



620 Series

- Black aluminium with raw inner

FLEXIBLE HOSE TEMPERATURE GUIDE

CELCIUS	TEMPERATURE			FAHRENHEIT	HOSE TYPE		
250				482			
240				464			
230				446			
220				428			
210				410			
200				392			
190				374			
180				356			
170				338			
160				320			
150				302			
140				284			
130				266			
120				248			
110				230			
100				212			
90				194			
80				176			
70				158			
60				140			
50				122			
40				104			
30				86			
20				68			
10				50			
0				32			
-10				14			
-20				-4			
-30				-22			
-40				-40			
-50				-58			
-60				-76			
-70				-94			

The temperature values in this guide are an estimation. Various factors can results in temperatures outside of those specified being experienced.